


Latitude 5320/Latitude 5320 2in1

Setup and Specifications

Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

Contents

Chapter 1: Set up your Latitude 5320	5
Chapter 2: Chassis overview	7
Right	7
Left	8
Top	9
Front	10
Bottom	11
Modes	11
Battery Charge and Status LED	14
Chapter 3: Specifications of Latitude 5320	15
Dimensions and weight	15
Processor	16
Chipset	16
Operating system	16
Memory	17
Intel Optane memory	17
External ports	18
Internal slots	18
Wireless module	18
WWAN module	19
Audio	20
Storage	20
Intel Optane Memory H20 with Solid State Storage (optional)	21
Media-card reader	21
Keyboard	21
Camera	22
Clickpad	23
Power adapter	23
Battery	24
Display	25
Sensor and control	27
Fingerprint reader (optional)	27
GPU—Integrated	28
Security	28
Operating and storage environment	28
Chapter 4: Dell low blue light display	30
Chapter 5: Keyboard shortcuts	31
Chapter 6: Getting help and contacting Dell Technologies	32

Chapter 7: Revision history..... 33

Set up your Latitude 5320

1. Connect the power adapter, and press the power button.



NOTE: The battery may go into power-saving mode during shipment to conserve charge on the battery. Ensure that the power adapter is connected to your computer when it is turned on for the first time.

2. Finish Windows setup.

Follow the on-screen instructions to complete the setup. When setting up, Dell Technologies recommends that you:

- Connect to a network for Windows updates.

NOTE: If connecting to a secured wireless network, enter the password for the wireless network access when prompted.

- If connected to the Internet, sign in with or create a Microsoft account. If not connected to the Internet, create an offline account.
- On the **Support and Protection** screen, enter your contact details.

3. Locate and use Dell apps from the Windows Start menu—Recommended.

Table 1. Locate Dell apps








Dell apps	Details
	My Dell Centralized location for key Dell applications, help articles, and other important information about your computer. It also notifies you about the warranty status, recommended accessories, and software updates if available.
	Dell Product Registration Register your computer with Dell.

Table 1. Locate Dell apps (continued)


Dell apps	Details
	Dell Help & Support Access help and support for your computer.
	SupportAssist Proactively checks the health of your computer's hardware and software.  NOTE: Renew or upgrade your warranty by clicking the warranty expiry date in SupportAssist.
	Dell Update Updates your computer with critical fixes and important device drivers as they become available.
	Dell Digital Delivery Download software applications including software that is purchased but not pre-installed on your computer.

Chassis overview

Topics:


- [Right](#)
- [Left](#)
- [Top](#)
- [Front](#)
- [Bottom](#)
- [Modes](#)
- [Battery Charge and Status LED](#)

Right

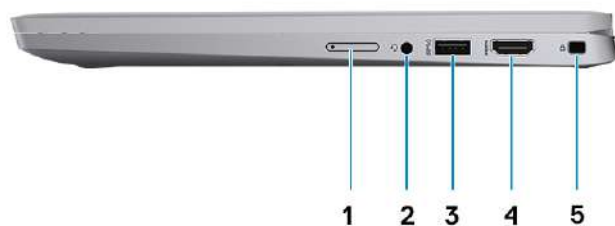


1. microSIM-card tray (optional)
2. Universal audio port
3. USB 3.2 Gen1 port with PowerShare
4. HDMI 2.0 port
5. Wedge-shaped lock slot

Left

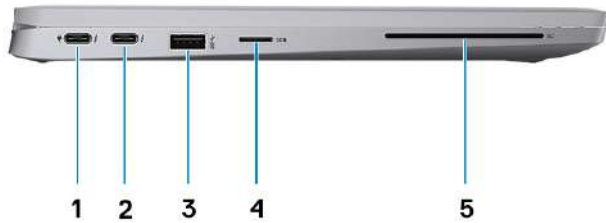


1. Thunderbolt 4 port with DisplayPort Alt Mode/USB4/Power Delivery
2. Thunderbolt 4 port with DisplayPort Alt Mode/USB4/Power Delivery
3. USB 3.2 Gen 1 port
4. microSD-card slot
5. Smart card reader slot (optional)

Top

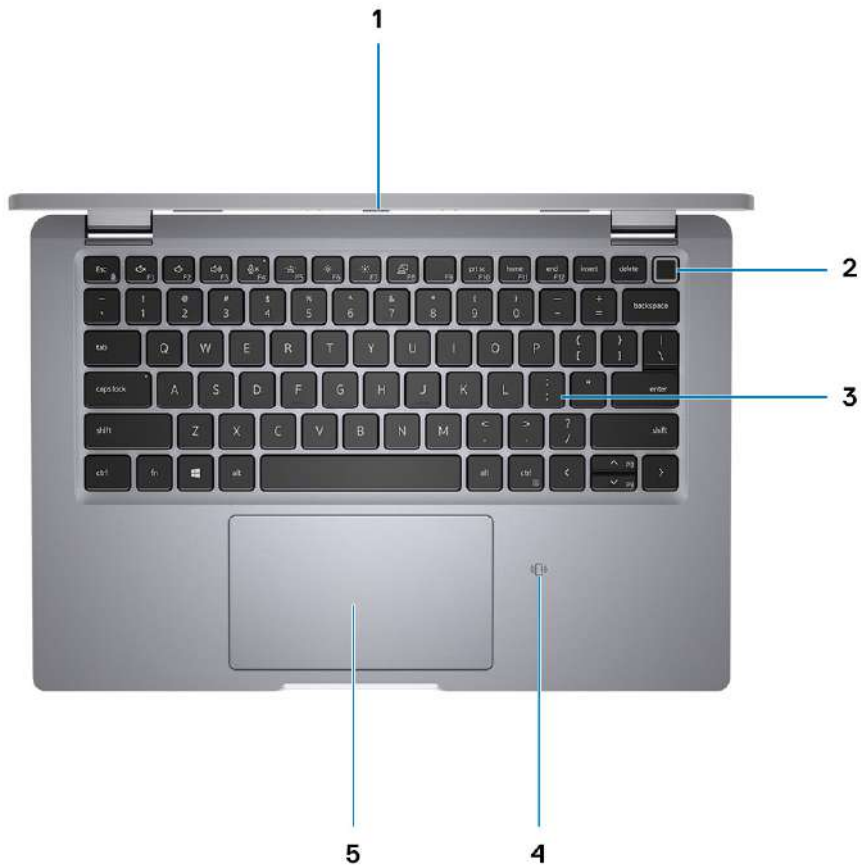


1. Privacy shutter
2. Power button (with optional fingerprint reader)
3. Keyboard
4. NFC/contactless card (optional)
5. Clickpad

Front

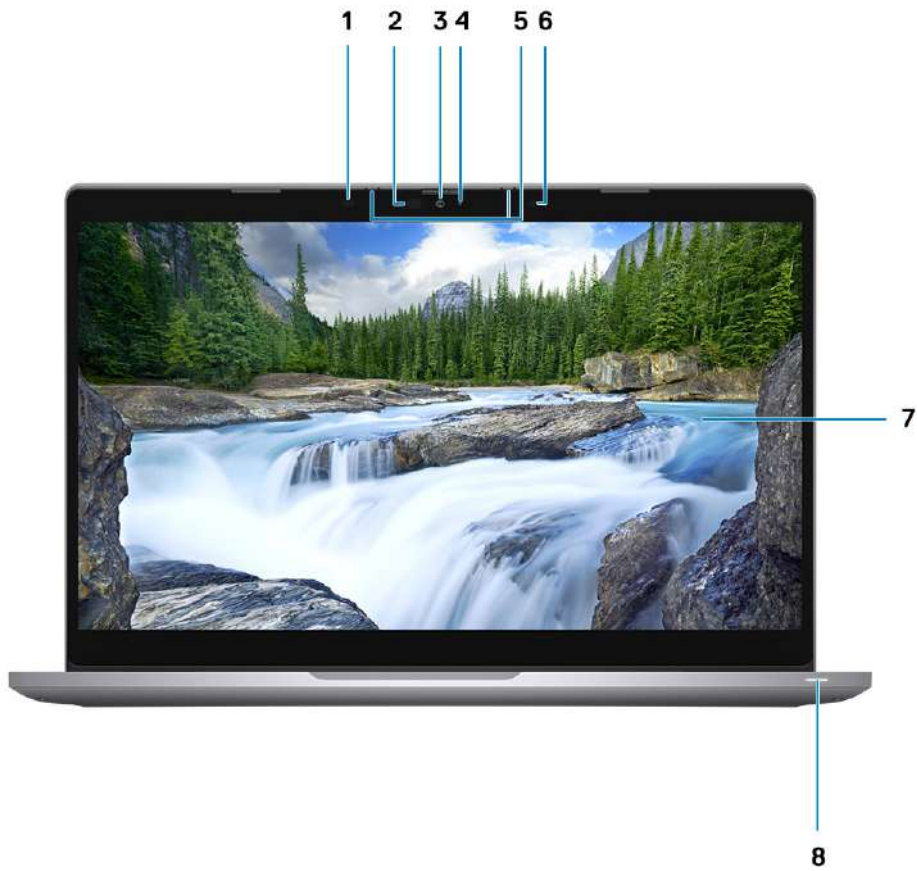

1. Proximity sensor (optional)
2. IR LED (optional)
3. RGB IR Camera (optional)
4. RGB LED (optional)
5. Microphone
6. Ambient Light Sensor (ALS) (optional)
7. LCD panel
8. Battery indicator LED/diagnostic LED

Bottom

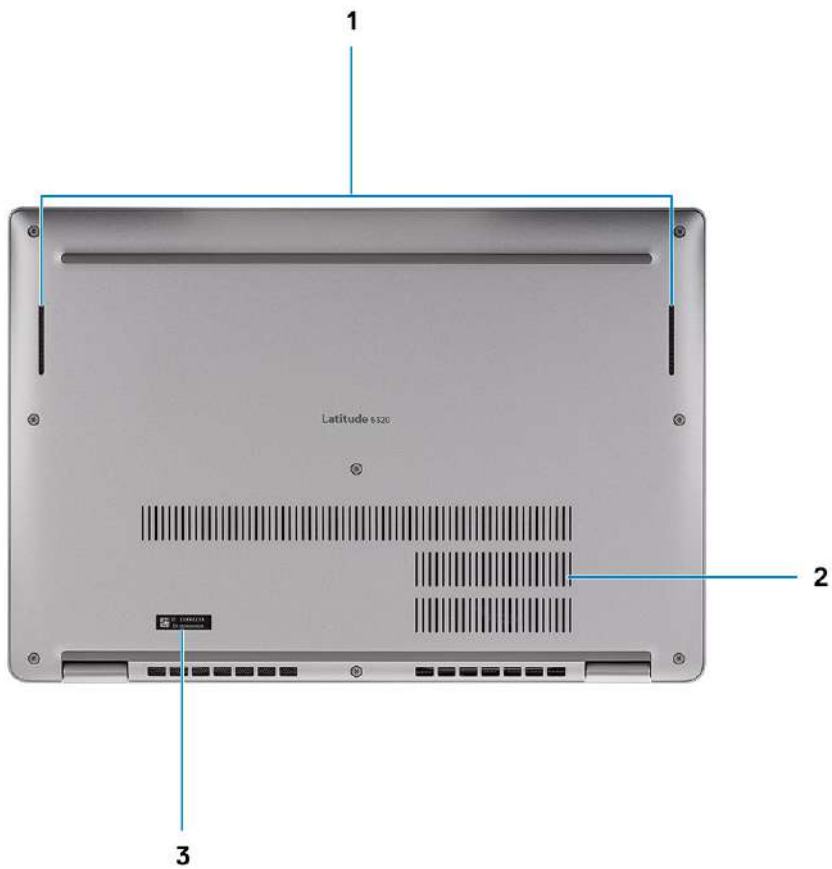

1. Speakers
2. Thermal vent
3. Service Tag label

Modes

NOTE: The modes are applicable only to Latitude 5320 2-in-1 (an upsell option).

Laptop



Tablet



Stand



Tent



Battery Charge and Status LED

Table 2. Battery Charge and Status LED Indicator

Power Source	LED Behavior	System Power State	Battery Charge Level
AC Adapter	Off	S0 - S5	Fully Charged
AC Adapter	Solid White	S0 - S5	< Fully Charged
Battery	Off	S0 - S5	11-100%
Battery	Solid Amber (590+/-3 nm)	S0 - S5	< 10%

- S0 (ON) - System is turned on.
- S4 (Hibernate) - The system consumes the least power compared to all other sleep states. The system is almost at an OFF state, expect for a trickle power. The context data is written to hard drive.
- S5 (OFF) - The system is in a shutdown state.

Specifications of Latitude 5320

NOTE: Offerings may vary by region. The following specifications are only those required by law to ship with your computer. For more information about the configuration of your computer, go to **Help and Support** in your Windows operating system and select the option to view information about your computer.

Topics:

- Dimensions and weight
- Processor
- Chipset
- Operating system
- Memory
- Intel Optane memory
- External ports
- Internal slots
- Wireless module
- WWAN module
- Audio
- Storage
- Intel Optane Memory H20 with Solid State Storage (optional)
- Media-card reader
- Keyboard
- Camera
- Clickpad
- Power adapter
- Battery
- Display
- Sensor and control
- Fingerprint reader (optional)
- GPU—Integrated
- Security
- Operating and storage environment

Dimensions and weight

The following table lists the height, width, depth, and weight of your Latitude 5320.




Table 3. Dimensions and weight

Description	Values
Height:	16.96 mm (0.67 in.)
Width	305.70 mm (12.04 in.)
Depth	207.50 mm (8.17 in.)
Weight (minimum)	Laptop - 1.18 kg (2.61 lb) 2-in-1 - 1.32 kg (2.90 lb) NOTE: The weight of your system depends on the configuration ordered and the manufacturing variability.

Processor

The following table lists the details of the processors supported by your Latitude 5320.

Table 4. Processor

Description	Option one	Option two	Option three	Option four
Processor type	11th Generation Intel Core i3-1125G4	11th Generation Intel Core i5-1135G7	11th Generation Intel Core i5-1145G7	11th Generation Intel Core i7-1185G7
Processor wattage	17.50 W	17.50 W	17.50 W	17.50 W
Processor core count	4	4	4	4
Processor thread count	8	8	8	8
Processor speed	2.00 GHz to 3.70 GHz	2.40 GHz to 4.20 GHz	2.60 GHz to 4.40 GHz	3.00 GHz to 4.80 GHz
Processor cache	8 MB	8 MB	8 MB	12 MB
Integrated graphics	Intel UHD Graphics	Intel Iris X ^e Graphics	Intel Iris X ^e Graphics	Intel Iris X ^e Graphics
<p> NOTE: i5 and i7 will have Intel UHD graphics if the system is configured with a single-channel memory configuration.</p> <p> NOTE: Intel UHD Graphics with single-channel memory configuration</p> <p> NOTE: Intel Iris X^e graphics with dual-channel memory configuration</p>				

Chipset

The following table lists the details of the chipset that is supported by your Latitude 5320.

Table 5. Chipset

Description	Values
Chipset	Intel PCH-LP
Processor	11th Generation Intel Core i3/i5/i7
DRAM bus width	64-bit
Flash EPROM	32 MB
PCIe bus	Up to Gen3

Operating system

Your Latitude 5320 supports the following operating systems:

- Windows 11 Home, 64-bit
- Windows 11 Home National Academic, 64-bit
- Windows 11 Pro, 64-bit
- Windows 11 Pro National Academic, 64-bit
- Windows 10 Home, 64-bit
- Windows 10 Pro, 64-bit
- Windows 10 Pro Education, 64-bit

- Windows 10 Enterprise, 64-bit
- Ubuntu 20.04 LTS, 64-bit

Memory

The following table lists the memory specifications that are supported by your Latitude 5320.

Table 6. Memory specifications

Description	Values
Memory slots	Onboard memory
Memory type	DDR4
Memory speed	3200 MHz
Maximum memory configuration	32 GB
Minimum memory configuration	4 GB
Memory size per slot	4 GB, 8 GB, 16 GB, 32 GB
Memory configurations supported	<ul style="list-style-type: none"> • 4 GB, DDR4, 3200 MHz, single-channel, integrated • 8 GB, DDR4, 3200 MHz, dual-channel, integrated • 16 GB, DDR4, 3200 MHz, dual-channel, integrated • 32 GB, DDR4, 3200 MHz, dual-channel, integrated

Intel Optane memory

Intel Optane memory functions only as a storage accelerator. It neither replaces nor adds to the memory (RAM) installed on your computer.

NOTE: Intel Optane memory is supported on computers that meet the following requirements:

- 11th Generation or higher Intel Core i3/i5/i7 processor
- Windows 10 64-bit version or higher (Anniversary Update)
- Latest version of Intel Rapid Storage Technology driver

Table 7. Intel Optane memory

Description	Values
Type	M.2 2280, PCIe NVMe, Intel Optane memory H20
Interface	Gen 3 PCIe x4 NVMe
Connector	M.2 2280
Configurations supported	32 GB + 512 GB
Capacity	32 GB + 512 GB

External ports

The following table lists the external ports on your Latitude 5320.


Table 8. External ports

Description	Values
USB ports	<ul style="list-style-type: none"> One USB 3.2 Gen 1 port One USB 3.2 Gen 1 port with PowerShare Two Thunderbolt 4 ports with DisplayPort Alt Mode/USB4/Power Delivery
Audio port	One Universal Audio Jack
Video port/ports	<ul style="list-style-type: none"> One HDMI 2.0 port Two DisplayPorts over Type-C
Media-card reader	One microSD-card slot
Docking port	Supported through Type-C
Power-adaptor port	USB-C power-adaptor port
Security-cable slot	One wedge-shaped lock slot

Internal slots

The following table lists the internal slots of your Latitude 5320.

Table 9. Internal slots

Description	Values
M.2	<ul style="list-style-type: none"> M.2 2230 slot for Wi-Fi and Bluetooth combo card One M.2 2230 slot for solid-state drive One M.2 2280 slot for solid-state drive/Intel Optane One M.2 3042 slot for WWAN card <p> NOTE: To learn more about the features of different types of M.2 cards, search Dell Support Site.</p>


Wireless module

The following table lists the Wireless Local Area Network (WLAN) module specifications of your Latitude 5320.

Table 10. Wireless module specifications

Description	Option one	Option two	Option three	Option four
Model number	Intel Wi-Fi 6 AX201	Intel AX210	Qualcomm QCA61x4A	Realtek RTL8822CE
Transfer rate	Up to 2.40 Gbps	Up to 2.40 Gbps	Up to 867 Mbps	Up to 867 Mbps
Frequency bands supported	2.4 GHz/5 GHz	2.4 GHz/5 GHz	2.4 GHz/5 GHz	2.4 GHz/5 GHz
Wireless standards	<ul style="list-style-type: none"> Wi-Fi 802.11a/b/g 	<ul style="list-style-type: none"> Wi-Fi 802.11a/b/g 	<ul style="list-style-type: none"> Wi-Fi 802.11a/b/g 	<ul style="list-style-type: none"> Wi-Fi 802.11a/b/g Wi-Fi 4 (Wi-Fi 802.11n)


Table 10. Wireless module specifications (continued)

Description	Option one	Option two	Option three	Option four
	<ul style="list-style-type: none"> • Wi-Fi 4 (Wi-Fi 802.11n) • Wi-Fi 5 (Wi-Fi 802.11ac) • Wi-Fi 6 (Wi-Fi 802.11ax) 	<ul style="list-style-type: none"> • Wi-Fi 4 (Wi-Fi 802.11n) • Wi-Fi 5 (Wi-Fi 802.11ac) • Wi-Fi 6 (Wi-Fi 802.11ax) 	<ul style="list-style-type: none"> • Wi-Fi 4 (Wi-Fi 802.11n) • Wi-Fi 5 (Wi-Fi 802.11ac) 	<ul style="list-style-type: none"> • Wi-Fi 5 (Wi-Fi 802.11ac)
Encryption	<ul style="list-style-type: none"> • 64-bit/128-bit WEP • AES-CCMP • TKIP 	<ul style="list-style-type: none"> • 64-bit/128-bit WEP • AES-CCMP • TKIP 	<ul style="list-style-type: none"> • 64-bit/128-bit WEP • AES-CCMP • TKIP 	<ul style="list-style-type: none"> • 64-bit/128-bit WEP • AES-CCMP • TKIP
Bluetooth wireless card  NOTE: The functionality of the Bluetooth wireless card may vary based on the operating system.	Bluetooth 5.1	Bluetooth 5.2	Bluetooth 5.0	Bluetooth 5.0

WWAN module

The following table lists the Wireless Wide Area Network (WWAN) module supported on your Latitude 5320.

Table 11. WWAN module specifications

Description	Values
Model number	Intel XMM 7360 Global LTE-Advanced (DW5820e) CAT9
Form factor	M.2 3042 form factor
Transfer rate	Up to 450 Mbps DL/50 Mbps UL (Cat 9)
Frequency bands supported	(1, 2, 3, 4, 5, 7, 8, 11, 12, 13, 17, 18, 19, 20, 21, 26, 28, 29, 30, 38, 39, 40, 41, 66), HSPA+ (1, 2, 4, 5, 8)
Power supply	DC 3.135 V to 4.4 V, typical 3.3 V
Temperature	<ul style="list-style-type: none"> • Normal operating temperature: -10°C to + 55°C • Extended operating temperature: -20°C to +65°C
Antenna connector	<ul style="list-style-type: none"> • WWAN Main Antenna x 1 • WWAN Diversity Antenna x 1
Wake on Wireless	Supported
Network standards	LTE FDD/TDD, WCDMA/HSPA+, GNSS/ Beidou
 NOTE: For instructions on how to find your computer's IMEI (International Mobile Station Equipment Identity) number, see the knowledge base article 000143678 at Dell Support Site .	

Audio

The following table lists the audio specifications of your Latitude 5320.

Table 12. Audio specifications

Description		Values
Audio controller		Realtek ALC3254
Stereo conversion		Supported
Internal audio interface		High-definition audio
External audio interface		Universal Audio Jack
Number of speakers		Two
Internal-speaker amplifier		Supported (audio codec integrated)
External volume controls		Keyboard shortcut controls
Speaker output:		
	Average	2 W
	Peak	2.5 W
Microphone		Digital-array microphones

Storage

This section lists the storage options on your Latitude 5320.

Your computer supports one of the following configurations:

- M.2 2230, PCIe x4 NVMe, Class 35 SSD
- M.2 2280, PCIe x4 NVMe, Class 40 SSD
- M.2 2230, PCIe x4 NVMe, Class 35 SED
- M.2 2280, PCIe x4 NVMe, Class 40 SED

The primary drive of your computer varies with the storage configuration. For systems with a M.2 drive, the M.2 drive is the primary drive.

Table 13. Storage specifications

Storage type	Interface type	Capacity
M.2 2230, PCIe x4 NVMe, Class 35 SSD	Gen 3 PCIe x4 NVMe	128 GB, 256 GB, 512 GB
M.2 2280, PCIe x4 NVMe, Class 40 SSD	Gen 3 PCIe x4 NVMe	256 GB, 512 GB, 1 TB
M.2 2280, PCIe x4 NVMe, Class 40 SSD	Gen 4 PCIe x4 NVMe	2 TB
M.2 2230, PCIe x4 NVMe, Class 35 SED	Gen 3 PCIe x4 NVMe	256 GB

Intel Optane Memory H20 with Solid State Storage (optional)

Intel Optane Memory technology utilizes 3D XPoint memory technology and functions as a non-volatile storage cache/accelerator and/or storage device depending on the Intel Optane Memory installed in your computer.

Intel Optane Memory H20 with Solid State Storage functions as both a non-volatile storage cache/accelerator (enabling enhanced read/write speeds for hard-drive storage) and a solid-state storage solution. It neither replaces nor adds to the memory (RAM) installed on your computer.

Table 14. Intel Optane Memory H20 with Solid State Storage specifications

Description	Values
Interface	PCIe 3 x4 NVMe <ul style="list-style-type: none"> One PCIe 3 x2 for Optane memory One PCIe 3 x2 for solid-state storage
Connector	M.2
Form factor	2280
Capacity (Intel Optane memory)	Up to 32 GB
Capacity (solid-state storage)	Up to 512 GB

NOTE: Intel Optane Memory H20 with Solid State Storage is supported on computers that meet the following requirements:

- 11th Generation or higher Intel Core i3/i5/i7 processors
- Windows 10 64-bit version or higher (Anniversary Update)
- Intel Rapid Storage Technology driver version 18.1.0.1027 or higher

Media-card reader

The following table provides the specification of media cards that are supported by your Latitude 5320.

Table 15. Media-card reader specifications

Description	Values
Media-card slot type	One microSD-card slot
Media-cards supported	<ul style="list-style-type: none"> micro-Secure Digital (mSD) micro-Secure Digital High Capacity (mSDHC) micro-Secure Digital Extended Capacity (mSDXC)
<p>NOTE: The maximum capacity of the media-card reader varies depending on the standard of the media card that is inserted in your computer.</p>	

Keyboard

The following table lists the keyboard specifications of your Latitude 5320.

Table 16. Keyboard specifications

Description	Values
Keyboard type	<ul style="list-style-type: none"> Standard non-backlit keyboard

Table 16. Keyboard specifications (continued)

Description	Values
	<ul style="list-style-type: none"> Standard backlit keyboard
Keyboard layout	QWERTY
Number of keys	<ul style="list-style-type: none"> United States and Canada: 79 keys United Kingdom: 80 keys Japan: 83 keys
Key pitch	X=18.05 mm key pitch Y=18.05 mm key pitch
Keyboard shortcuts	<p>Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions.</p> <ul style="list-style-type: none"> To type the alternate character, press Shift and the desired key. To perform secondary functions, press Fn and the desired key. <p>NOTE: You can define the primary behavior of the function keys (F1–F12) by changing Function Key Behavior in the BIOS Setup program.</p> <p>NOTE: If Copilot in Windows is not available on your computer, pressing the Copilot key launches Windows search. For more information about Copilot in Windows, see the Knowledge Base Resource at the Dell Support site.</p>

Camera

The following table lists the camera specifications of your Latitude 5320.

Table 17. Camera specifications

Description	Values		
Number of cameras	One	One	One
Type	HD RGB camera	HD RGB + Ir camera	FHD RGB + Ir camera
Location	Front camera	Front camera	Front camera
Sensor type	CMOS sensor technology	CMOS sensor technology	CMOS sensor technology
Resolution			
Camera			
Still image	0.92 megapixel	0.92 megapixels	2.07 megapixels
Video	1280 x 720 (HD) at 30 fps	1280 x 720 (HD) at 30 fps	1920 x 1080 (FHD) at 30 fps
Infrared camera			
Still image	NA	0.23	0.23
Video	NA	640 x 360	640 x 360

Table 17. Camera specifications (continued)

Description		Values		
Diagonal viewing angle				
	Camera	78.6 degrees	87 degrees	87.6 degrees
	Infrared camera	NA	87 degrees	87.6 degrees

Clickpad

The following table lists the clickpad specifications of your Latitude 5320.

Table 18. Clickpad specifications

Description		Values
Resolution:		>=300 dpi
Dimensions:		
	Horizontal	115 mm (4.53 in.)
	Vertical	67 mm (2.64 in.)


Power adapter

The following table lists the power adapter specifications of your Latitude 5320.

Table 19. Power adapter specifications

Description	Option 1	Option 2	Option 3	Option 4
Type	45 W AC adapter, USB-C	65 W AC adapter, USB-C	90 W AC adapter, USB-C	60 W AC adapter USB-C
Input voltage	100 VAC-240 VAC	100 VAC-240 VAC	100 VAC-240 VAC	100 VAC x 240 VAC
Input frequency	50 Hz-60 Hz	50 Hz-60 Hz	50 Hz-60 Hz	50 Hz x 60 Hz
Input current (maximum)	1.3 A	1.7 A	1.5 A	1.7 A
Output current (continuous)	<ul style="list-style-type: none"> 20 V/2.25 A (Continuous) 15 V/3 A (Continuous) 9 V/3 A (Continuous) 5 V/3 A (Continuous) 	<ul style="list-style-type: none"> 20 V/3.25 A (Continuous) 15 V/3 A (Continuous) 9 V/3 A (Continuous) 5 V/3 A (Continuous) 	<ul style="list-style-type: none"> 20 V/4.50 A (Continuous) 15 V/3 A (Continuous) 9 V/3 A (Continuous) 5 V/3 A (Continuous) 	<ul style="list-style-type: none"> 20 V/3 A (Continuous) 15 V/3 A (Continuous) 9 V/3 A (Continuous) 5 V/3 A (Continuous)
Rated output voltage	20 VDC/15 VDC/9 VDC/5 VDC	20 VDC/15 VDC/9 VDC/5 VDC	20 VDC/15 VDC/9 VDC/5 VDC	20 VDC/15 VDC/9 VDC/5 VDC
Temperature range:				
	Operating	0 °C (32 °F) to 40 °C (104 °F)	0 °C (32 °F) to 40 °C (104 °F)	0 °C (32 °F) to 40 °C (104 °F)

Table 19. Power adapter specifications (continued)

Description		Option 1	Option 2	Option 3	Option 4
	Storage	-40 °C (-40 °F) to 70 °C (158 °F)	-40 °C (-40 °F) to 70 °C (158 °F)	-40 °C (-40 °F) to 70 °C (158 °F)	- 40° C to 70°C (158°F)
		 CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.			

Battery

The following table lists the battery specifications of your Latitude 5320.

Table 20. Battery specifications




Description		Option 1	Option 2
Type		3-cell rechargeable Li-ion battery, 42 WHr	4-cell rechargeable Li-ion battery, 63 WHr
Voltage		11.40 VDC	15.20 VDC
Weight (maximum)		0.21 kg (0.46 lb)	0.26 kg (0.58 lb)
Dimensions:			
	Height	92.80 mm (3.65 in.)	92.80 mm (3.65 in.)
	Width	238 mm (9.37 in.)	238 mm (9.37 in.)
	Depth	5.70 mm (0.22 in.)	5.70 mm (0.22 in.)
Temperature range:			
	Operating	Minimum operating temperature: Charge/ Discharge : 0°C (32°F) Maximum operating temperature: <ul style="list-style-type: none"> • Charge: 45°C/ 113°F • Discharge: 70°C/ 158°F 	Minimum operating temperature: Charge/ Discharge : 0°C (32°F) Maximum operating temperature: <ul style="list-style-type: none"> • Charge: 45°C/ 113°F • Discharge: 70°C/ 158°F
	Storage	Minimum storage temperature: -20°C (-4°F) Maximum storage temperature: 65°C (149°F)	Minimum storage temperature: -20°C (-4°F) Maximum storage temperature: 65°C (149°F)
Operating time		Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.
Charging time (approximate)		<ul style="list-style-type: none"> • ExpressCharge Boost (0% up to 35%) : 20 minutes • Express charge : 2 hours • Standard charge : 3 hours  NOTE: Control the charging time, duration, start and end time, and so on, using the Dell Power Manager application. For more information about the Dell Power Manager see, <i>Me and My Dell</i> on Dell Support Site	<ul style="list-style-type: none"> • ExpressCharge Boost (0% up to 35%) : 20 minutes • Express charge : 2 hours • Standard charge : 3 hours  NOTE: Control the charging time, duration, start and end time, and so on, using the Dell Power Manager application. For more information about the Dell Power Manager see, <i>Me and My Dell</i> on Dell Support Site
Life span (approximate)		<ul style="list-style-type: none"> • 1 year for Standard battery • 3 years for LcL battery 	<ul style="list-style-type: none"> • 1 year for Standard battery • 3 years for LcL battery
Coin-cell battery		No	No
ExpressCharge		Supported	Supported

Table 20. Battery specifications (continued)

Description	Option 1	Option 2
User replaceable	No	No
Operating time	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.
	 CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.	

Display

The following table lists the display specifications of your Latitude 5320 and Latitude 5320 2-in-1.

Latitude 5320

Table 21. Display specifications

Description		Option 1	Option 2	Option 3	Option 4
Type		13.3-inch Full High Definition (FHD)	13.3-inch Full High Definition (FHD)	13.3-inch Full High Definition (FHD) (Privacy/Touch)	13.3-inch Full High Definition (FHD) (Touch)
Panel technology		Wide Viewing Angle (WVA), Super Low Power (SLP)	Wide Viewing Angle (WVA), Super Low Power (SLP), Low Blue Light (LBL)	Wide Viewing Angle (WVA), Super Low Power (SLP)	Wide Viewing Angle (WVA), Super Low Power (SLP)
Luminance (typical)		250 nits	400 nits	300 nits	300 nits
Dimensions (Active Area):					
	Height	165.24 mm (6.51 in.)	165.24 mm (6.51 in.)	165.24 mm (6.51 in.)	165.24 mm (6.51 in.)
	Width	293.76 mm (11.57 in.)	293.76 mm (11.57 in.)	293.76 mm (11.57 in.)	293.76 mm (11.57 in.)
	Diagonal	337.08 mm (13.27 in.)	337.08 mm (13.27 in.)	337.08 mm (13.27 in.)	337.08 mm (13.27 in.)
Native Resolution		1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080
Megapixels		2.07	2.07	2.07	2.07
Color gamut		45% NTSC	100% sRGB typical	100% sRGB typical	72% NTSC
Pixels per Inch (PPI)		166	166	166	166
Contrast Ratio (min)		600:1	1000:1	600:1	600:1
Response Time (max)		35 ms	35 ms	35 ms	35 ms
Refresh Rate		60 Hz	60 Hz	60 Hz	60 Hz

Table 21. Display specifications (continued)

Description				
Horizontal viewing angle (Measurement represents typical viewing angle)	85 +/- degrees	85 +/- degrees	<ul style="list-style-type: none"> Sharing Mode: 85 +/- degrees Privacy Mode (brightness < 40%) : 30/30 (max) degrees 	85 +/- degrees
Vertical viewing angle (Measurement represents typical viewing angle)	85 +/- degrees	85 +/- degrees	<ul style="list-style-type: none"> Sharing Mode: 85 +/- degrees Privacy Mode (brightness < 40%) : 30/30 (max) degrees 	85 +/- degrees
Pixel Pitch	0.153 x 0.153 mm	0.153 x 0.153 mm	0.153 x 0.153 mm	0.153 x 0.153 mm
Power Consumption (maximum)	3.50 W @ Mosaic	2.52 W @ Mosaic	<ul style="list-style-type: none"> Sharing mode : 3.35 W Privacy mode : 3.45 W 	4.8 W
Anti-glare vs glossy finish	Anti-glare	Anti-glare	Anti-glare	Anti-glare
Touch options	No	No	Yes	Yes
Adaptive sync	No	No	No	No
Stylus support	Not supported	Not supported	Not supported	Not supported

Latitude 5320 2-in-1

Table 22. Display specifications

Description		
Type	Full High Definition (FHD)	
Panel technology	Wide Viewing Angle (WVA), Super Low Power (SLP)	
Luminance (typical)	300 nits	
Dimensions (Active Area):		
	Height	165.24 mm (6.51 in.)
	Width	293.76 mm (11.57 in.)
	Diagonal	337.08 mm (13.27 in.)
Native Resolution	1920 x 1080	
Megapixels	2.07	
Color gamut	72% NTSC	
Pixels per Inch (PPI)	166	
Contrast Ratio (min)	800:1 typ, 600:1 min	
Response Time (max)	35 ms	
Refresh Rate	60 Hz	
Horizontal View Angle	80 min degrees	
Vertical View Angle	80 min degrees	

Table 22. Display specifications (continued)

Description	
Pixel Pitch	0.153 x 0.153
Power Consumption (maximum)	4.2 W
Anti-glare vs glossy finish	Anti-glare
Touch options	Yes
Adaptive sync	No
Stylus support	Supported

Sensor and control

The following table lists the sensor and control list for your Latitude 5320.

Table 23. Sensor and control

Sensor support	
Sensor	Ambient Light Sensor
	Windows Adaptive Color
	Accelerometer (G sensor): Laptop: <ul style="list-style-type: none">• One on the system board.• One on the system board and another on the hinge-up (for configuration that supports Express Sign-in feature with proximity sensor). 2-in-1: <ul style="list-style-type: none">• One on the system board and another on the hinge-up.

Fingerprint reader (optional)

The following table lists the specifications of the optional fingerprint-reader.




Table 24. Fingerprint reader specifications

Description	Values
Sensor technology	Capacitive
Sensor resolution	500 dpi
Sensor area	
Sensor pixel size	108 x 88

GPU—Integrated

The following table lists the specifications of the integrated Graphics Processing Unit (GPU) supported by your Latitude 5320.

Table 25. GPU—Integrated

Controller	External display support	Memory size	Processor
Intel UHD 630 Graphics	HDMI 2.0, DP over USB Type-C	Shared system memory	11th Generation Intel Core i3
<p> NOTE: Intel UHD Graphics with Intel Core i3 processors.</p> <p> NOTE: Intel UHD Graphics with Intel Core i5/i7 processors and single-channel memory configuration.</p> <p> NOTE: Intel Iris Xe Graphics with Intel Core i5/i7 processors and dual-channel memory configuration.</p>			

Security

Table 26. Hardware Security


Hardware security options
Trusted Platform Module (TPM) 2.0 discrete
FIPS 140-2 certification for TPM
Trusted Computing Group (TCG) Certification for TPM
Fingerprint reader in power button tied to ControlVault 3
ControlVault 3 Advanced Authentication with FIPS 140-2 Level 3 Certification
Contacted Smart Card and ControlVault 3
Contactless Smart Card, NFC, and ControlVault 3
SED SSD NVMe, SSD, and hard drive (Opal and non-Opal) per SDL
FIPS 201 Full Scan FPR and ControlVault 3

Operating and storage environment

This table lists the operating and storage specifications of your Latitude 5320.

Airborne contaminant level: G1 as defined by ISA-S71.04-1985

Table 27. Computer environment

Description	Operating	Storage
Temperature range	0°C to 35°C (32°F to 95°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	10% to 90% (noncondensing)	5% to 95% (noncondensing)
Vibration (maximum)*	0.66	NA
Shock (maximum)	140	NA
Altitude (maximum)	3048	10668
<p> CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.</p>		

* Measured using a random vibration spectrum that simulates user environment.

† Measured using a 2 ms half-sine pulse when the hard drive is in use.

Dell low blue light display

 **WARNING: Prolonged exposure to blue light from the display may lead to long-term effects such as eye strain, eye fatigue, or damage to the eyes.**

Blue light is a color in the light spectrum which has a short wavelength and high energy. Chronic exposure to blue light, particularly from digital sources, may disrupt sleep patterns and cause long-term effects such as eye strain, eye fatigue, or damage to the eyes.

The display on this computer is designed to minimize blue light and complies with TÜV Rheinland's requirement for low blue light displays.

Low blue light mode is enabled at the factory, so no further configuration is necessary.

To reduce the risk of eye strain, it is also recommended that you:

- Position the display at a comfortable viewing distance between 20 and 28 inches (50 and 70 cm) from your eyes.
- Blink frequently to moisten your eyes, wet your eyes with water, or apply suitable eye drops.
- Look away from your display, and gaze at a distant object at 20 ft (609.60 cm) away for at least 20 seconds during each break.
- Take an extended break for 20 minutes every two hours.

Keyboard shortcuts



 **NOTE:** Keyboard characters may differ depending on the keyboard language configuration. Keys that are used for shortcuts remain the same across all language configurations.

Table 28. List of keyboard shortcuts

Keys	Primary Behavior	Secondary Behavior (Fn + Key)
Fn + Esc	Escape	Toggle Fn-key lock
Fn + F1	Mute audio	F1 behavior
Fn + F2	Decrease volume	F2 behavior
Fn + F3	Increase volume	F3 behavior
Fn + F4	Mic Mute	F4 behavior
Fn + F5	Keyboard backlight  NOTE: Not applicable for non-backlight keyboard.	F5 behavior
Fn + F6	Decrease screen brightness	F6 behavior
Fn + F7	Increase screen brightness	F7 behavior
Fn + F8	Switch to external display	F8 behavior
Fn + F9	Disable camera	F9 behavior
Fn + F10	Print Screen	F10 behavior
Fn + F11	Home	F11 behavior
Fn + F12	End	F12 behavior
Fn + Left Arrow	Left Arrow	Home
Fn + Right Arrow	Right Arrow	End
Fn + Right Ctrl	Emulates right click	--
Fn + P	SafeScreen (e-Privacy)	--

Getting help and contacting Dell Technologies

Self-help resources


You can get information and help on Dell Technologies products and services using these self-help resources:


Table 29. Self-help resources

Self-help resources	Resource location
Information about Dell Technologies products and services	Dell Site
Contact Support	In Windows search, type <code>Contact Support</code> , and press Enter.
Online help for operating system	Windows Support Site
Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals, and documents.	Your Dell Technologies computer is uniquely identified using a Service Tag or Express Service Code. To view relevant support resources for your Dell Technologies computer, enter the Service Tag or Express Service Code at Dell Support Site . For more information about how to find the Service Tag for your computer, see Instructions on how to find your Service Tag or Serial Number .
Dell Technologies knowledge base articles	<ol style="list-style-type: none"> 1. Go to Dell Support Site. 2. On the menu bar at the top of the Support page, select Support > Support Library. 3. In the Search field on the Support Library page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles.

Contacting Dell Technologies

To contact Dell Technologies for sales, technical support, or customer service issues, see [Contact Support at Dell Support Site](#).

 **NOTE:** Availability of the services may vary depending on the country or region, and product.

 **NOTE:** If you do not have an active Internet connection, you can find contact information about your purchase invoice, packing slip, bill, or Dell Technologies product catalog.

Revision history

Tracks all updates that are made to the document. It typically includes the date of change, version number, and a brief description of the modification. This log helps maintain transparency, accountability, and a clear timeline of progress.

Table 30. Revision history

Revision	Date	Description
A00	12-17-2020	Original publish date.
A06	08-11-2025	Added Realtek RTL8822CE in WLAN specs.